

PLATINUM

living your style

VIEW®





nichel



titanio



nichel

Decorì - Decors - Decors - Dekore




Mosaico Nichel 30x60 (12"x24")




Mosaico Mix 30x60 (12"x24")

Listello Metal 1x60 (0,4"x24")




Nichel Mosaico 2,5x2,5
su rete 30x30 (12"x12")


Pezzi speciali - Trims Pieces speciales - Formstücke




Battiscopa
7,5x60 - 3"x24"



Gradino Step Antislip
30x60 - 12"x24"




**Gradone Toro Lineare
Costa Retta**
30x60 - 12"x24"



**Gradone Angolare Dx/Sx
Costa Retta**
30x30 - 12"x12"

Formati - Sizes - Formats - Format



60x60 (24"x24")




30x60 (12"x24")

titanio

Decori - Decors - Decors - Dekore




Mosaico Titanio 30x60 (12"x24")

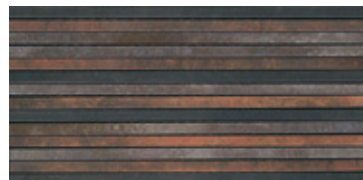

Mosaico Mix 30x60 (12"x24")



Listello Metal 1x60 (0,4"x24")




Titanio Mosaico 2,5x2,5
su rete 30x30 (12"x12")


Pezzi speciali - Trims Pieces speciales - Formstücke




Battiscopa
7,5x60 - 3"x24"



Gradino Step Antislip
30x60 - 12"x24"




**Gradone Toro Lineare
Costa Retta**
30x60 - 12"x24"



**Gradone Angolare Dx/Sx
Costa Retta**
30x30 - 12"x12"

Formati - Sizes - Formats - Format



60x60 (24"x24")



30x60 (12"x24")








titanio





PLATINUM

Caratteristiche tecniche - Technical features Technische Eigenschaften - Caractéristiques techniques

Norma UNI EN 14411 Gruppo B1a GL	Valori View View values View Werte Valeur View	Tipo di prova Standard of test Testnorm Norme du test
 Assorbimento d'acqua Water absorption Wasseraufnahme Absorption d'eau	≤ 0,5%	ISO 10545-3
 Resistenza alla flessione Bending strenght Biegefestigkeit Résistance à la flexion	Conforme	ISO 10545-4
 Resistenza al gelo Frost resistance Frostwiderstandsfähigkeit Résistance au gel	Ingelivo Frost-proof Frostsischer Ingélif	ISO 10545-12
 Resistenza chimica Chemical resistance Chemicalienfestigkeit Résistance chimique	Inattaccabile Unaffected Nicht angegriffen Inattaquable	ISO 10545-13
 Scivolosità Anti-slip index Rutschheremmung Coefficient anti-dérapage	R9	DIN 51130-04

Imballi - Packages - Verpackungen - Emballages

FORMATI Sizes Formats Formate						
	Pz x Box	M ² x Box	Kg x Box	Box x Pall.	M ² x Pall.	Kg x Pall.
60x60	4	1,44	32,00	32	46,08	1.025,00
30x60	8	1,44	32,00	32	46,08	1.025,00

ISTRUZIONI PER LA POSA

Si consiglia una fuga minima di 2 mm.
Miscelare i prodotti da più scatole.

LAYING INSTRUCTION

We recommend a gap of at least 2 mm.
Mix products from multiple boxes.

VERLEGUNGSHINWEISE

Es wird eine Fuge von mindestens 2 mm empfohlen.
Die Produkte aus mehreren Schachteln mischen.

ISTRUCTION POUR LA POSE

Nous vous recommandons de laisser une entrée de minimum de 2 mm.
Mélanger les produits de plusieurs boîtes.

Variazione di stonalizzazione

Color/shade variation guideline - Brandfarben Mischungstabelle - Effets nuancés possible



V1

Aspetto uniforme
Uniform appearance
Einheitliches aussehen
Aspect uniforme



V2

Lieve variazione
Slight variations
Geringe abweichung
Légère variation



V3

Moderata variazione
Moderate variations
Mässige abweichung
Variation modérée



V4

Forte stonalizzazione
Substantial variations
Akzentuierte variation
Effet dénuance très accentué

VIEW

VIA SAN PIETRO, 83 41049 SASSUOLO (MO) - ITALY TEL +39 0536 808029
s.r.l. FAX +39 0536 808157 info@viewceramiche.com www.viewceramiche.com